


## Hub Bearing Unit

## Third Generation Hub Bearing

Unit-DAC2F11409760

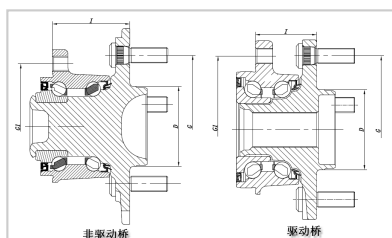

## Boundary dimensions(mm)

G 114.3

G1 **97**I **60**

D 62

D1 **76**

## Basic load ratings(kN)

Cr 48.2

Cor 43.1

Bearing No. **DAC2F11409760**

Distance between effective load centers

a(mm) 75.36

Mass(kg) (approx.)

kg

The high precision bearing is suitable for the use in machine tools and other applications focusing on the greatest precision.

- it is suitable for extremely high radial loads
- its rotational accuracy is greater than P5
- it has a tapered bore (1:12)
- it is equipped with a lubrication groove and three bores on the outer ring
- separable
- material: 100Cr6 (rolling bearing steel), brass (cage)
- temperature resistance ranging from circa -20°C up to 120°C

HEBEI HUANSHENG BEARING CO., LTD-Tel:+86-0319-8541203-Email:hbhs@hbhsbearing.com-  
www.hbhsbearing.com