


Metric Series

60 Series-602X,602XZZ,-,-

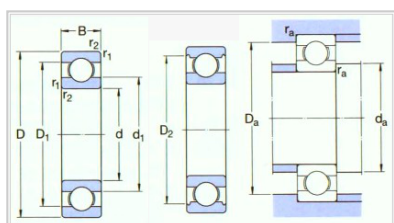

Designation

With shielded	602X
Open type	602XZZ

With seal VV

-

With seal DD

-

Principal dimensions [mm]

d	2.5
D	8
B	2.8
B1	4
r(min)	0.15

Basic load ratings (N)

Cr	550
Cor	175

Basic load ratings {kgf}

Cr	56
Cor	18

Speed ratings (rpm)

Grease

ZZ	60000
----	-------

D·D

-

Oil

Z	71000
---	-------

Abutment and fillet dimensions (mm)

da(min)	3.7
db(max)	4.1
Da(Max)	6.8
Db(min)	7
ra(max)	0.15
rb(max)	0.15

Weight (g)

Open type	0.63
With shielded	0.83