


Metric Series

60 Series-606,606ZZ,606VV,606DD

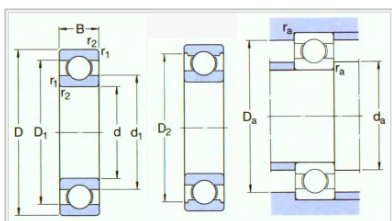

Designation	
With shielded	<b>606</b>
Open type	<b>606ZZ</b>
With seal VV	<b>606VV</b>
With seal DD	<b>606DD</b>
Principal dimensions [mm]	
d	<b>6</b>
D	17
B	<b>6</b>
B1	<b>6</b>
r(min)	0.3
Basic load ratings(N)	
Cr	2260
Cor	835
Basic load ratings{kgf}	
Cr	231
Cor	85
Speed ratings(rpm)	
Grease	
ZZ	38000
D·D	34000
Oil	
Z	45000
Abutment and fillet dimensions (mm)	
da(min)	8
db(max)	8.2
Da(Max)	15
Db(min)	14.8
ra(max)	0.3
rb(max)	0.3
Weight(g)	
Open type	5.97
With shielded	6.08