


Metric Series

60 Series-608,608ZZ,608VV,608DD

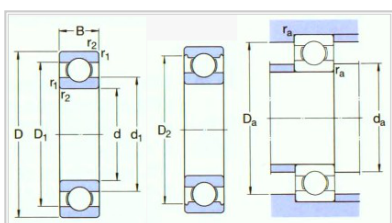

Designation

With shielded	<b>608</b>
Open type	<b>608ZZ</b>
With seal VV	<b>608VV</b>
With seal DD	<b>608DD</b>

Principal dimensions [mm]

d	<b>8</b>
D	22
B	7
B1	7
r(min)	0.3

Basic load ratings(N)

Cr	3300
Cor	1370

Basic load ratings{kgf}

Cr	335
Cor	140

Speed ratings(rpm)

Grease

ZZ	34000
D·D	28000

Oil

Z	40000
---	-------

Abutment and fillet dimensions (mm)

da(min)	10
db(max)	10.5
Da(Max)	20
Db(min)	19
ra(max)	0.3
rb(max)	0.3

Weight(g)

Open type	12.1
With shielded	12.2