


Metric Series

MR Series-MR63,MR63ZZ,-,-

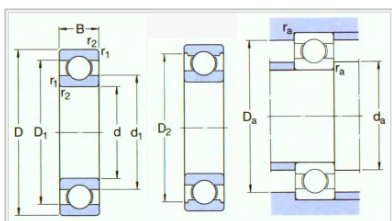

Designation	
With shielded	<b>MR63</b>
Open type	<b>MR63ZZ</b>
With seal VV	-
With seal DD	-
Principal dimensions [mm]	
d	<b>3</b>
D	<b>6</b>
B	2
B1	2.5
r(min)	0.1
Basic load ratings(N)	
Cr	208
Cor	74
Basic load ratings{kgf}	
Cr	21
Cor	7.5
Speed ratings(rpm)	
Grease	
ZZ	71000
D·D	-
Oil	
Z	80000
Abutment and fillet dimensions (mm)	
da(min)	3.8
db(max)	3.7
Da(Max)	5.2
Db(min)	5.4
ra(max)	0.1
rb(max)	0.1
Weight(g)	
Open type	0.2
With shielded	0.27